

Dynotuning - Engine Management - Motorsport

MaxxECU PWM module



Technical Data:

Supply voltage: 8-24V
Max intermitent load: 60A
Max continous load: 50A

Operating temperature: -40 till 125C

Waterproof and protected from overload and high temperatures. Controls electric motors (fuel pump, fan, water pump, lights, etc.). The PWM module is controlled via CAN and does only work with MaxxECU EMS..


2016-10-19

MTune controllabe load settings between 0 and 100%. Be sure to place the module as close to the load as possible to avoid interference. Do not mount the module close to heat sources such as exhaust components.






CAN-bus wiring

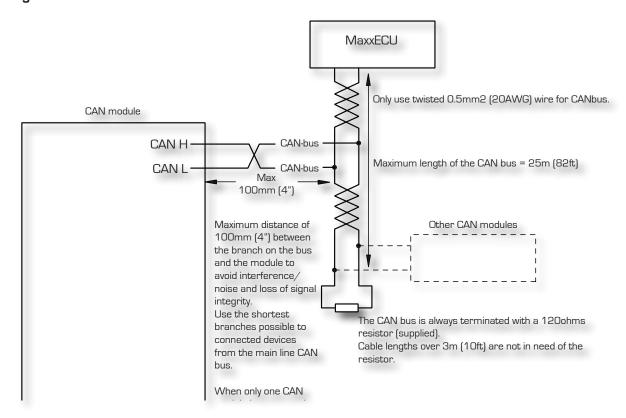

Wirings

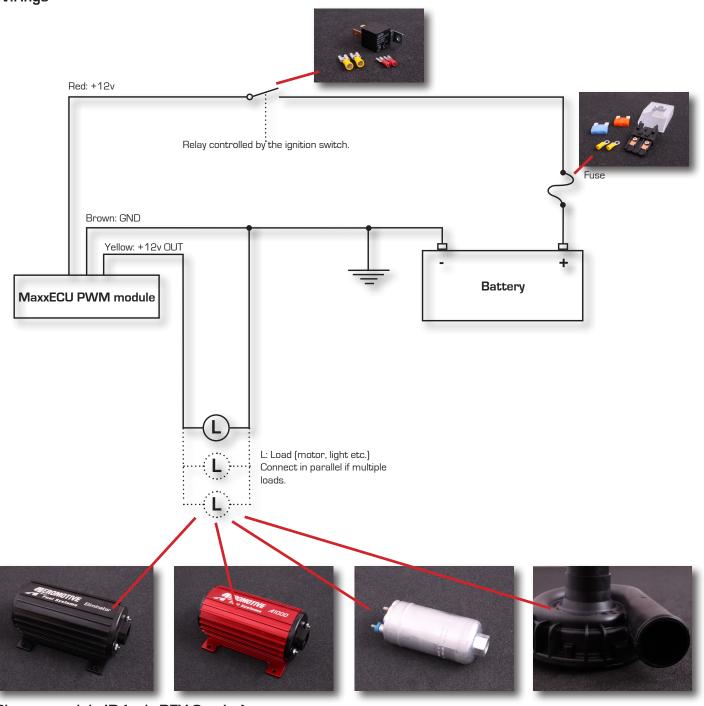

Change module ID (only REV 3 units)

